

Trimline 55 XH Front/Tunnel

A tunnel fireplace is the central focal point of a room.



The Trimline 55XH is also available in a front version, so it can be built into various applications. Moreover, it comes with the Ecomax remote control and you have the options to add Wi-Fi control with our Trimline Fires app.

With a tunnel fire, you can enjoy the view on the fire from more than one room. A tunnel fire draws all the attention, without detracting from the rest. On the contrary, it enhances the entire entourage. Trimline Fires fireplaces fit every style and design. The Trimline 55XH is 1.10 metres high, making it a real eye-catcher in the room.




Product specifications

Features

- Balanced flue gas fire
- Front/Tunnel model
- Double burner
- Wooden logs fuel bed
- Ecomax remote control
- Lamelas interior

Optionals

- Pebbles fuel bed
- Anti reflective glass
- Mains adapter GV60
- Wall bracket
- Domotica smart connection
- Wall switch
- Wi-fi control
- Puck control

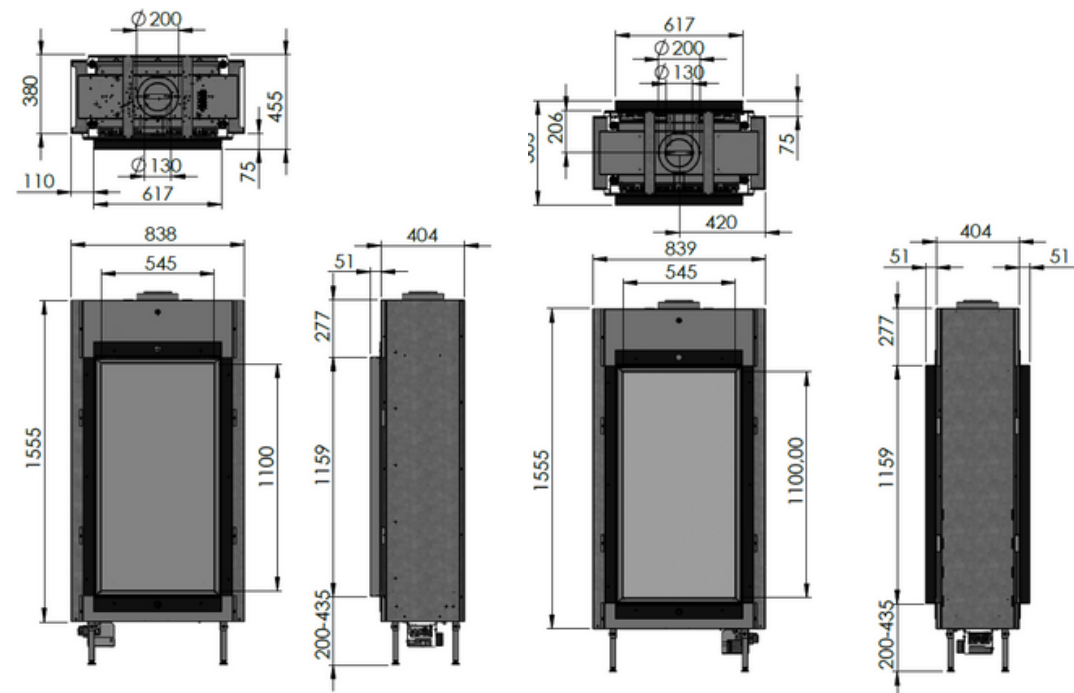

| Appliance name | Trimline 55XH Front/Tunnel | | | |
|---------------------------------|---|---------------------------|---------------------------|------------------------|
| Appliance type | Balanced flue free standing gas fire (C11, C31, C91) | | | |
| Purpose | Ambient heating, real flames | | | |
| Engine identification | 1194 - 1195 | | | |
| Gas type -pressure | Natural gas G25.3 – 25 mbar | Natural gas G20 – 20 mbar | Natural gas G25 – 20 mbar | LPG G30/31– 28-50 mbar |
| Heat input (kW) | 11.7 | 12.7 | 10.2 | 12.2 |
| Heat output max (kW) | 9.4 | 10.3 | 8.1 | 9.8 |
| Heat output min (kW) | 3.6 | 3.8 | 3.0 | 3.2 |
| Consumption (m3/h and kg/h LPG) | 1.41 | 1.35 | 1.26 | 0.38 |
| Efficiency (%) | 81 | 81 | 79 | 80 |
| Energy label highest efficiency | C | C | C | C |
| Flue lay out wall termination | Max 5.5 m horizontal | | | |
| Weight (kg) | 200 | | | |
| Efficiency class EN613 | 2 | | | |
| NOX Class | 5 | | | |
| PIN ID CE | 1312DN6644 | | | |
| Gas connection | Gas connection 3/8 | | | |
| Electrical connection | 6VDC battery powered | | | |
| Gas control system | Mertik Maxitrol SYMAX B6R radio controlled 866 mHz | | | |
| Safety | Thermocouple flame supervision and pressure hatches | | | |
| Heat distribution | Convection system | | | |
| Connectivity | Optional App control (Android and IOS), wall switch and domotica connection | | | |
| Flue type and diameter | Holetherm-CC concentric flue 100-150mm / 130-200mm | | | |
| Remarks | Distance to combustibile walls, see installation manual | | | |

Installation details

Concentric flue system

Using the Holetherm CC double wall chimney system the flue gases are safely transported to the outside and fresh combustion-air is pulled inside the appliance. Balanced flue appliances can be installed using a wall terminal so no traditional chimney is needed. Holetherm CC is made of high quality stainless steel and approved according CE standards in combination with the Trimline appliances.

